

Technical Specification As Per ISO 13006:2018-ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.10%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.88%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.25%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.17%	ISO-10545-2
6	Water Absorption	>10%	12.95%	ISO-10545-3
7	MOR	Minimum 15 N/mm3	17.51 N/mm3	ISO-10545-4
8	Breaking Strength	Not less than 200 N	508.36 N	ISO-10545-4
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11


Packaging Details

Size	Texture	Thickness	Pieces/Box	Sqm./Box	Sqft./Box	Kg./Box
150x150mm	Plain	7.50mm	34	0.765	8.25	10.50



Size.
150x150mm

CANVAS GLOSSY
SERIES

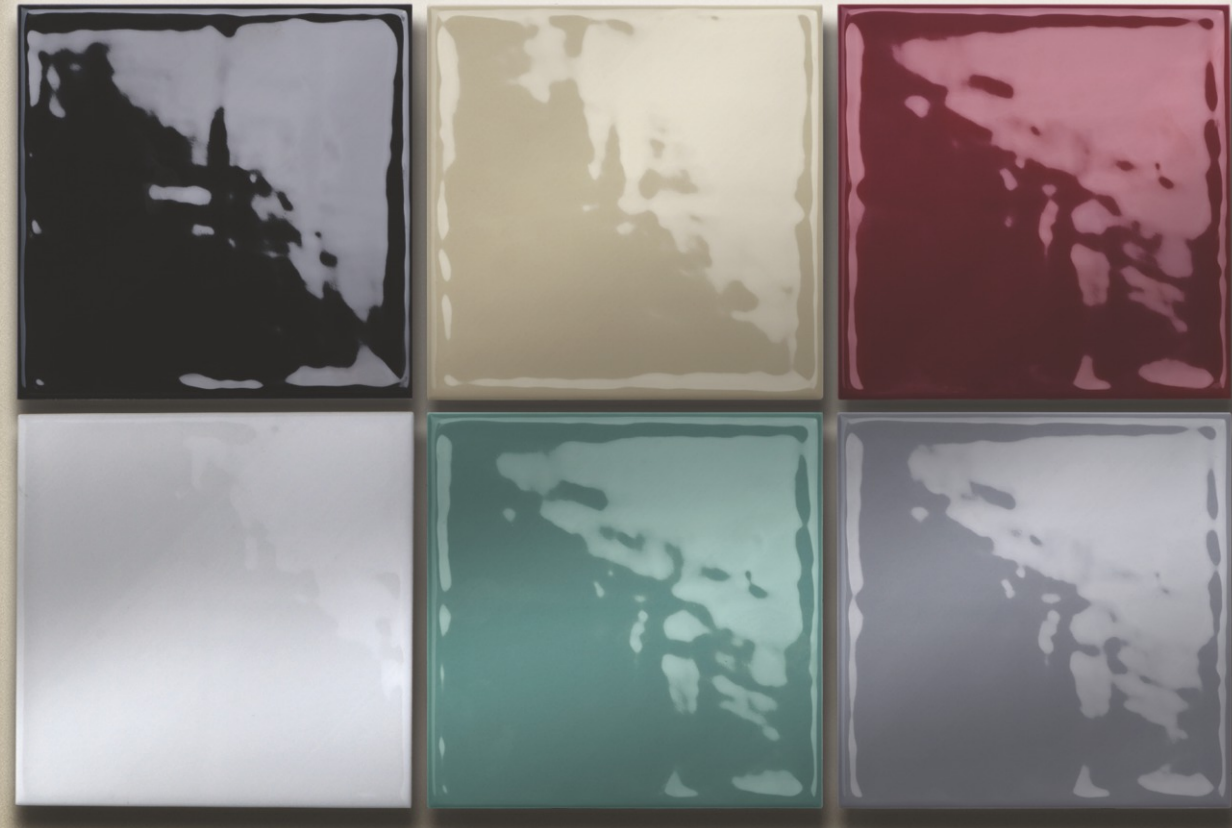

CANVAS GLOSSY
SERIES

Size.
150x150mm

Finish.
Glossy


Thickness.
7.50mm



Gesso




Cane

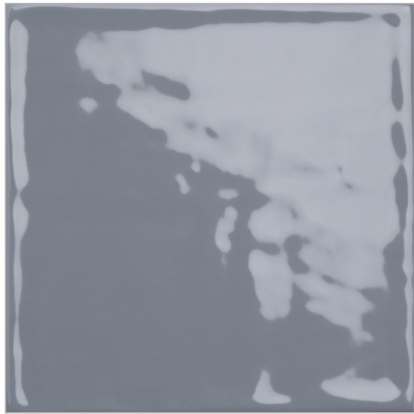


Conte




TILE PERFECTION, EVERY TIME

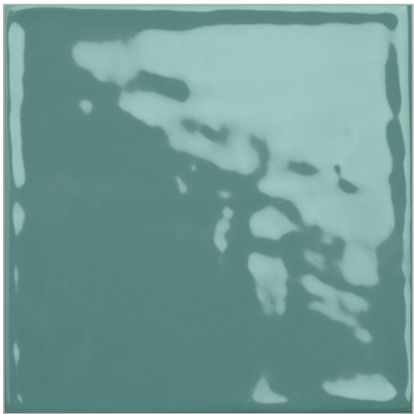

Eucalyptus

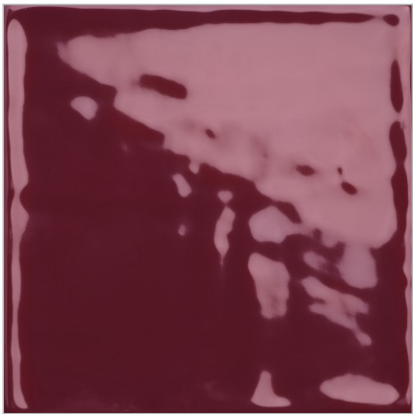

Cherry Stain

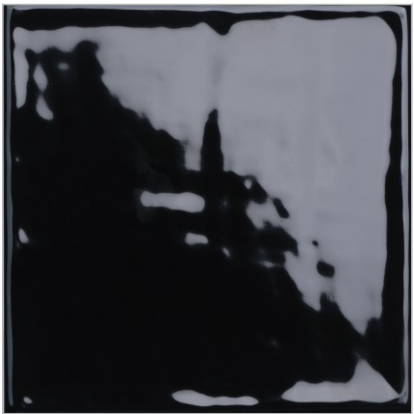

Carbon Glass