

Technical Specification As Per ISO 13006:2018-ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.10%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.88%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.25%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.17%	ISO-10545-2
6	Water Absorption	>10%	12.95%	ISO-10545-3
7	MOR	Mlimum 15 N/mm3	17.51 N/mm3	ISO-10545-4
8	Breaking Strength	Not less than 200 N	508.36 N	ISO-10545-4
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11


Packaging Detials

Size	Texture	Thickness	Pieces/Box	Sqm./Box	Sqft./Box	Kg./Box
300x300mm	Plain	8.00mm	09	0.81	8.72	14.00



Size.
300x300mm

BLACK & WHITE
SERIES

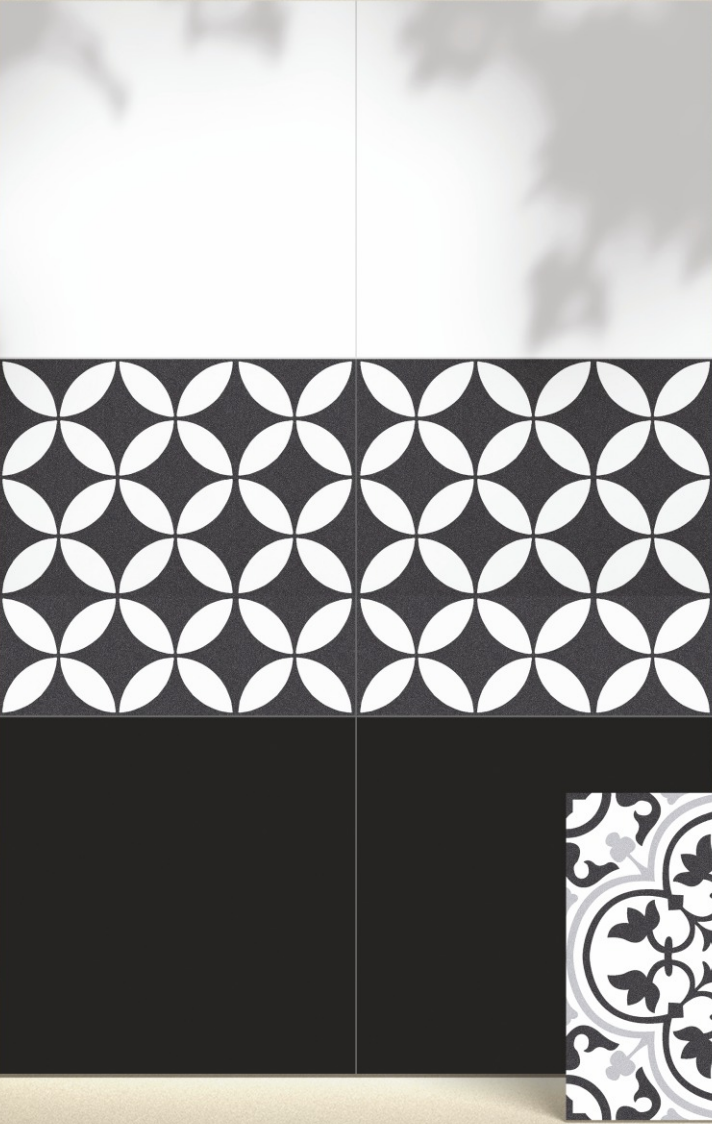


BLACK & WHITE
SERIES

Size.
300x300mm

Finish.
Matt

Thickness.
8mm

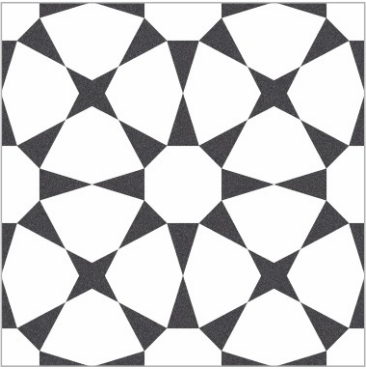

24001 Star




24002 Cric




24003 Apex



24004 Dicate

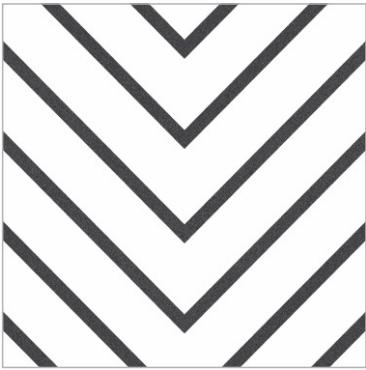

24005 Dash

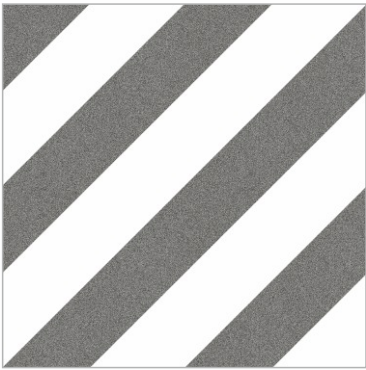

24006 Chord




TILE PERFECTION, EVERY TIME




24007 Stroke



24008 Bar

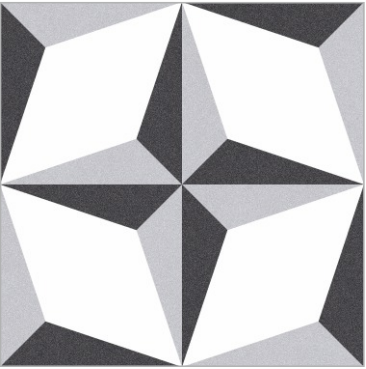

24009 Nova



White



Black



FIREDCLAY
ORIGINALS