

Technical Specification As Per ISO 13006:2018-ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.10%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.88%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.25%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.17%	ISO-10545-2
6	Water Absorption	>10%	12.95%	ISO-10545-3
7	MOR	Mlinimum 15 N/mm3	17.51 N/mm3	ISO-10545-4
8	Breaking Strength	Not less than 200 N	508.36 N	ISO-10545-4
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11

Packaging Detials

Size	Texture	Thickness	Pieces/Box	Sqm./Box	Sqft./Box	Kg./Box
50x200mm	Plain	8.00mm	90	0.90	9.68	13.3
50x200mm	Curve	9.50mm	70	0.70	7.53	12.3



Size.
50x200mm


CURVE MATT
SERIES





FIREDCLAY
ORIGINALS

CURVE MATT
SERIES

Size.
50x200mm


Thickness.
8mm

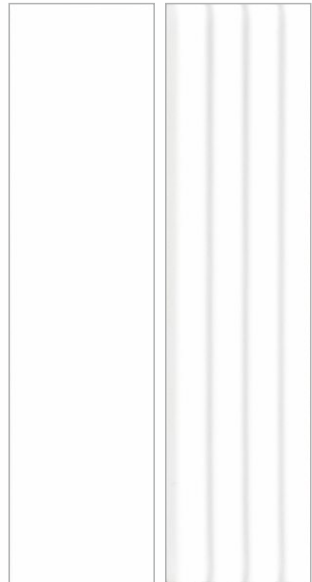

Curve Snow



Curve Glacier

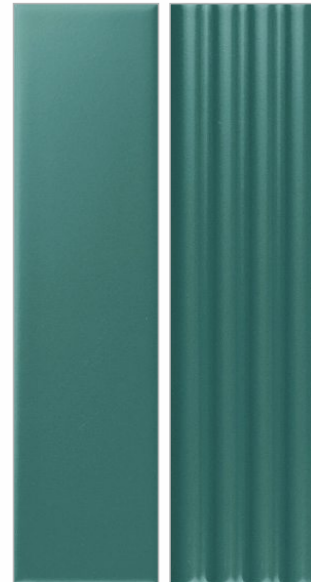

Curve Laurel



TILE PERFECTION, EVERY TIME




**EXPRESSIVE
SURFACE CHOICE**

Experience the subtle matt finished
Tiles with vibrant shades that amaze everyone.



Curve Naval

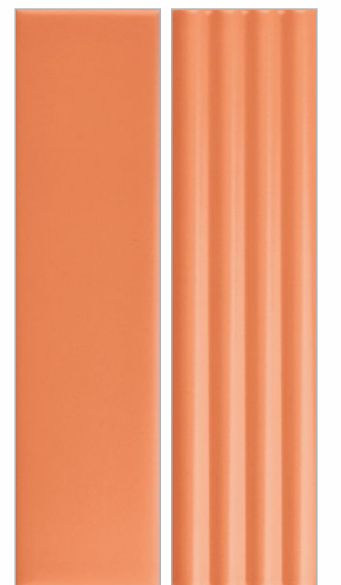

Curve Terra