

Technical Specification As Per ISO 13006:2018-ANNEXL

Sr.No.	Property	International Std.	OUR Tiles Value	Method of Testing
1	Deviation in Length and Width	± 0.6%	± 0.10%	ISO-10545-2
2	Deviation in Thickness	± 10%	± 1.88%	ISO-10545-2
3	Straightness of Sides	± 0.5%	± 0.29%	ISO-10545-2
4	Rectangularity	± 0.5%	± 0.25%	ISO-10545-2
5	Surface Flatness	± 0.5%	± 0.17%	ISO-10545-2
6	Water Absorption	>10%	12.95%	ISO-10545-3
7	MOR	Mlimum 15 N/mm3	17.51 N/mm3	ISO-10545-4
8	Breaking Strength	Not less than 200 N	508.36 N	ISO-10545-4
9	Density (g/cc)	Minimum 2.2	2.2423 g/cc	ISO-10545-3
10	Chemical Resistance	Minimum Class B	Class GA (PASS)	ISO-10545-13
11	Crazing Resistance	2 cycle	2 cycle (PASS) Fully Resistance	ISO-10545-11


Packaging Details

Size	Texture	Thickness	Pieces/Box	Sqm./Box	Sqft./Box	Kg./Box
50x200mm	Plain	8.00mm	90	0.90	9.68	13.3
50x200mm	Angle	9.50mm	70	0.70	7.53	12.3



Size.
50x200mm

ANGLE GLOSSY
SERIES

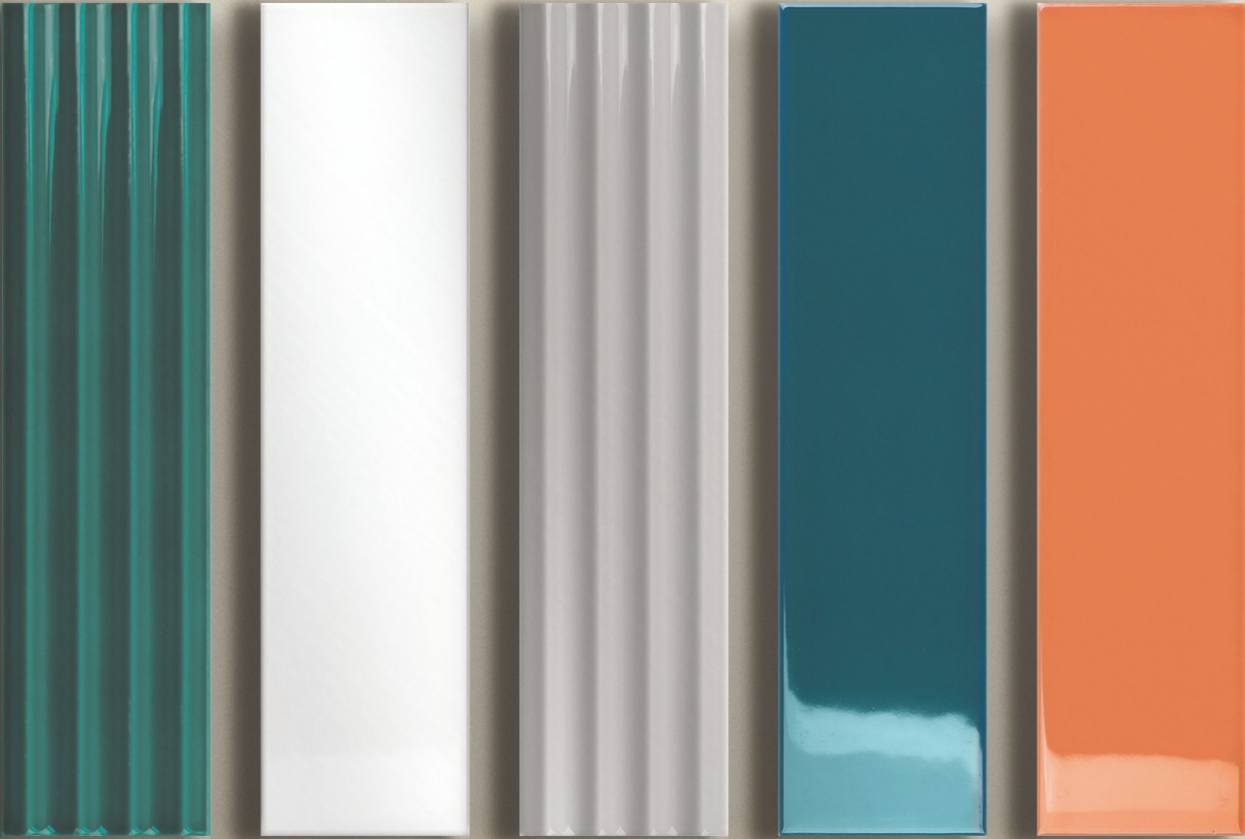

FIREDCLAY
ORIGINALS

◆ ◆ ◆
ANGLE GLOSSY
 SERIES

Size.
50x200mm

Finish.
Glossy

Thickness.
8mm




Angle Snow



Angle Glacier



Angle Laurel

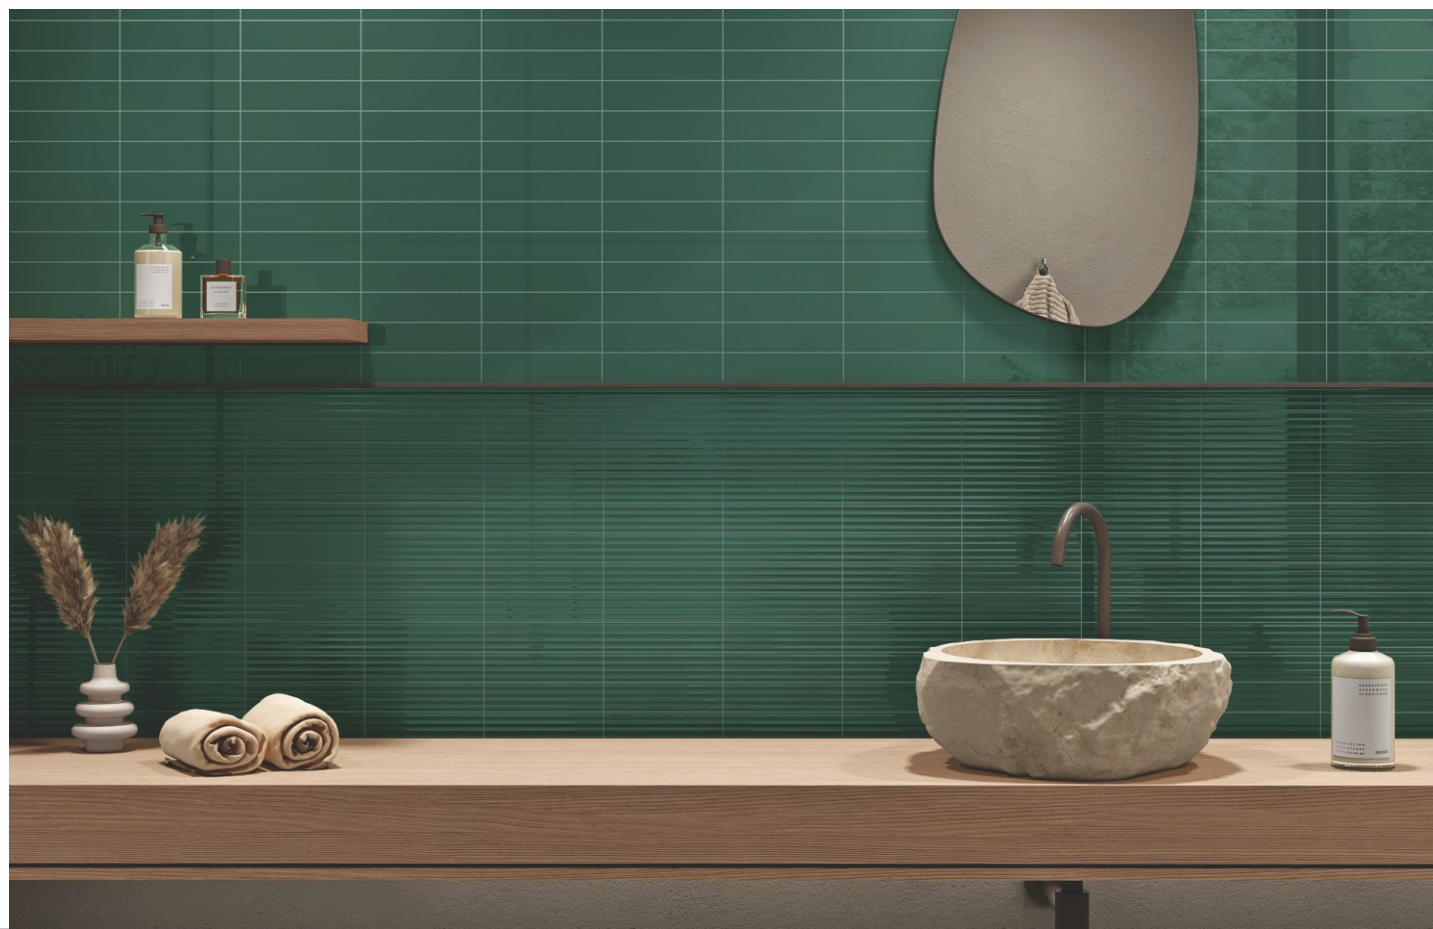


TILE PERFECTION, EVERY TIME




**SUPERIOR
 SURFACE BEAUTY**

Embrace vivid tones combined with
 Unique textures that elevate every decor.

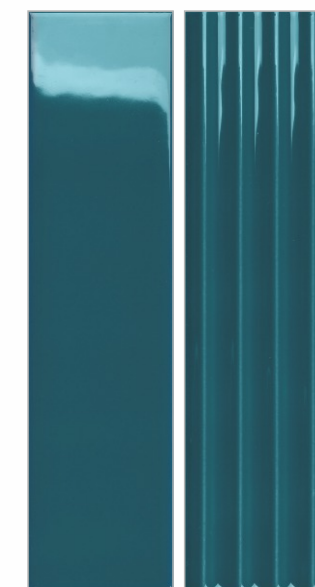

Angle Naval

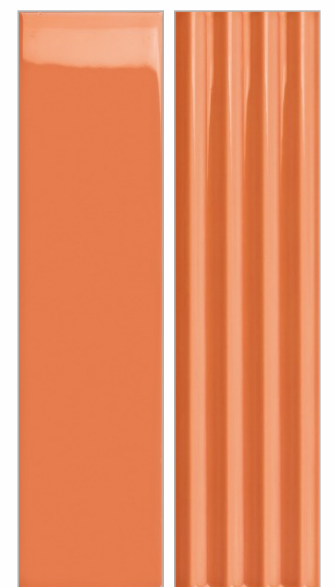

Angle Terra